



Walk Through Metal Detector With Measure Body Temperature UNIQSCAN

Model : UB500

Measure body temperature ,
Voice Broadcast ,
temperature display

Test distance: 10-15cm
Temperature accuracy:
Imported IR sensor $\pm 0.3-0.5\text{ }^{\circ}\text{C}$
Temperature response time 100 ms
Working environment temperature:
 $5\text{ }^{\circ}\text{C} \sim 40\text{ }^{\circ}\text{C}$

Modularization design,easy for
maintenance and replacement.

Easy assembly: designed with
only 2 pieces cables and 8 screws,
simply-to-follow instruction;



Front View

Back View

Program Self-diagnostic when power on,
no need initial or periodic calibration;

Sound & LED alarm:
Both Side LED indicator
6 zones, Sensitivity adjustable:
0-100 sensitivity

Harmless to human body: is harmless
with heart pacemaker, pregnant women,
magnetic floppy, recording tapes, etc.

Alarm strength indicator on control panel
Password protection, only the authorized
person can operate.

We owns all of the intellectual property rights (IPR) to its core technologies ,and have a experience engineer team with senior x-ray detection exports, signal and imagine processing specialist . Our excellent technical developing capacity to support us are ability to have continuesly new production lines.

PARAMETERS

- Gross weight: 65KG
- Power Supply: AC100v - 260 v
- Working temperature:-20°C-- +50°C
- Working Frequency :4KHZ—8KHZ
- Standard External size: 2220mm(H)X800mm(W)X580mm(D)
- Standard Internal size: 2010mm(H)X700mm(W)X500mm(D)
- Package size for door panels: 2280*570*210mm*1ctn
- Package size for control unit: 770*280*400 mm*1ctn

USE DOMAIN



Port



Airport



Train Station



Hospital



Hotel



Factory



Government



Bank

Usage condition

UB500

Pinpoint Zone Detection

The Uniqscan' s exclusive multiple target pinpointing with 6 zones standard shows precise target location on the left, center and right side of the body from head to toe.


Program

When the program is self-diagnostic, it does not require initial or periodic calibration, modularization design, easy for maintenance and replacement.

Installation

The UB500 design only 2 cables and 8 screws, operation instructions are simple. High density refractories are used to make the product stronger.

PRODUCT DETAILS



A. 5 Digital LED Count :Easy show & count passengers

B. 8 Screws: Easy assembly and install;

C. Socket: Easy connect both door panels;

D. Power Line : Support UK / European / USA standard;

E. Integrated Circuit Board : Intelligent circuit;

F. Infrared Sensor :Accuracy check;

G. Tamper Indication: Easy distinguish interference;

H. Foot Cover:Easy fastness;

Contact us:

Shenzhen Unisec Technology Co.,Ltd

Factory : 8/F Building F6, Juyin Science and Technology Industrial Park, No. 1 Ganli road, Jihua street, Longgang district, Shenzhen China

Tel: +086-0755-28793799 Fax: +086-0755-28791799



PRODUCT

POINT:



The UB-500' s Access Control Panel is designed for use by authorized personnel with specific, multi-level security with password protection, only the authorized person can operate ; Sound & LED alarm: Both Side LED indicator ,easily show where the metal is, Automatically count passengers and alarm times.

PRODUCT PACKAGING

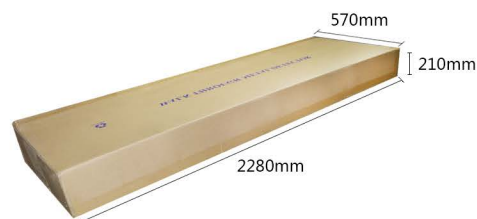

Recycling

Carton Dimension L*W*H (mm)
 Door Panel : 2280*570*210 mm
 Control Unit :770*400*280 mm
 Gross weight :65KG

We will arrange the most suitable logistics according to the actual situation and the customer's requirements. Our packing is very tight to prevent any breakage during shipment.